


Sperrekrok med øye EK-13 / Slinghooks with eye EK-13

Art.nr Item no.	For dim:	L mm	E mm	Ø mm	D mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
903306	6 mm	108	24	20	21	0,3	1,12	20
903308	7+8 mm	133	30	25	26	0,4	2,0	20
903310	10 mm	167	34	38	39	0,9	3,15	18
903313	13 mm	213	39	43	54	1,7	5,3	9
903316	16 mm	255	46	50	64	3,2	8,0	6
903320	20 mm	305	48	63	80,4	5,8	12,5	3

Standard EN 1677-2. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 1677-2. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Rep sett på side 12 / spare parts on page 12




Sperrekrok med gaffel EK-12 / Clevis slinghooks EK-12

Art.nr Item no.	For dim:	L mm	E mm	Ø mm	D mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
903306	6 mm	108	24	20	21	0,3	1,12	20
903308	7+8 mm	133	30	25	26	0,4	2,0	20
903310	10 mm	167	34	38	39	0,9	3,15	18
903313	13 mm	213	39	43	54	1,7	5,3	9
903316	16 mm	255	46	50	64	3,2	8,0	6
903320	20 mm	305	48	63	80,4	5,8	12,5	3

Standard EN 1677-2. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 1677-2. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Rep sett på side 12 / spare parts on page 12




Selvlukkende krok med øye EK-737 / Eye self locking hooks EK-737

Art.nr Item no.	For dim:	E mm	E1 mm	Ø mm	L mm	L1 mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
903506	6 mm	35	28	21	141	110	0,5	1,12	20
903508	7+8 mm	40	35	25	175	136	0,88	2,0	26
903510	10 mm	50	45	34,5	214	168	1,58	3,15	14
903513	13 mm	60	52,5	40	268	207	3,0	5,3	6
903516	16 mm	65	63,3	50	332	254	5,9	8,0	3
903520	20 mm	80	86	64,5	332	274	7,0	12,5	2
903522	22 mm	83	76	70	415	319	12,3	15,0	2

Standard EN 1677-3. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 1677-3. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Rep sett på side 12 / spare parts on page 12



Løfteredskap grade 100 1-part / Chain slings 1-part G10

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
970612	6 mm	2	2,68	1,4	1
970613	6 mm	3	3,49	1,4	1
970614	6 mm	4	4,29	1,4	1
970616	6 mm	6	5,89	1,4	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1

Art.nr Item no	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
970812	8 mm	2	4,75	2,5	1
970813	8 mm	3	6,24	2,5	1
970814	8 mm	4	7,73	2,5	1
970816	8 mm	6	10,71	2,5	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1

Art.nr Item no	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
971012	10 mm	2	7,92	4,0	1
971013	10 mm	3	10,23	4,0	1
971014	10 mm	4	12,54	4,0	1
971016	10 mm	6	17,16	4,0	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1

Art.nr Item no	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
971312	13 mm	2	14,15	6,7	1
971313	13 mm	3	18,02	6,7	1
971314	13 mm	4	21,89	6,7	1
971316	13 mm	6	29,63	6,7	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1

Art.nr Item no	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
971612	16 mm	2	25,32	10,0	1
971613	16 mm	3	31,17	10,0	1
971614	16 mm	4	36,75	10,0	1
971616	16 mm	6	48,45	10,0	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1



Andre dimansjoner bygges på ønsket mål. Ta kontakt for uforpliktende tilbud

Båndstropp / Webbing sling

Art.nr Item no.	WLL Tonn/Ton SF 1:7	Båndbredde / Width	Arbeidslenge/ Working length
701001	1,0	50 mm	1,0 meter
701002	1,0	50 mm	2,0 meter
701003	1,0	50 mm	3,0 meter
701004	1,0	50 mm	4,0 meter
701005	1,0	50 mm	5,0 meter
701006	1,0	50 mm	6,0 meter
701008	1,0	50 mm	8,0 meter
701010	1,0	50 mm	10,0 meter
701012	1,0	50 mm	12,0 meter

Art.nr Item no.	WLL Tonn/Ton SF 1:7	Båndbredde / Width	Arbeidslenge/ Working length
702001	2,0	60 mm	1,0 meter
702002	2,0	60 mm	2,0 meter
702003	2,0	60 mm	3,0 meter
702004	2,0	60 mm	4,0 meter
702005	2,0	60 mm	5,0 meter
702006	2,0	60 mm	6,0 meter
702008	2,0	60 mm	8,0 meter
702010	2,0	60 mm	10,0 meter
702012	2,0	60 mm	12,0 meter

Art.nr Item no.	WLL Tonn/Ton SF 1:7	Båndbredde / Width	Arbeidslenge/ Working length
703001	3,0	90 mm	1,0 meter
703002	3,0	90 mm	2,0 meter
703003	3,0	90 mm	3,0 meter
703004	3,0	90 mm	4,0 meter
703005	3,0	90 mm	5,0 meter
703006	3,0	90 mm	6,0 meter
703008	3,0	90 mm	8,0 meter
703010	3,0	90 mm	10,0 meter
703012	3,0	90 mm	12,0 meter

Art.nr Item no.	WLL Tonn/Ton SF 1:7	Båndbredde / Width	Arbeidslenge/ Working length
701001	5,0	150 mm	1,0 meter
701002	5,0	150 mm	2,0 meter
701003	5,0	150 mm	3,0 meter
701004	5,0	150 mm	4,0 meter
701005	5,0	150 mm	5,0 meter
701006	5,0	150 mm	6,0 meter
701008	5,0	150 mm	8,0 meter
701010	5,0	150 mm	10,0 meter
701012	5,0	150 mm	12,0 meter

Art.nr Item no.	WLL Tonn/Ton SF 1:7	Båndbredde / Width	Arbeidslenge/ Working length
702001	8,0	240 mm	1,0 meter
702002	8,0	240 mm	2,0 meter
702003	8,0	240 mm	3,0 meter
702004	8,0	240 mm	4,0 meter
702005	8,0	240 mm	5,0 meter
702006	8,0	240 mm	6,0 meter
702008	8,0	240 mm	8,0 meter
702010	8,0	240 mm	10,0 meter
702012	8,0	240 mm	12,0 meter

Andre størrelser på forespørsel. /
Other length and sizes on request.




Båndstropper blir levert i enhold til standard EN-1492-1 100% polyester. Sikkerhetsfaktor 7:1
Webbing slings are delivered according to EN-1492-1. 100% Polyester. Factor of safety 7:1

Grade 100 løfteketting / Grade 10 Lifting chains


Art.nr Item no.	t mm	l mm	b mm	Kg/mtr Kg/mtr	WLL Tonn/Ton SF 1:4	Meter / fat Meters per drum
920006	6	18	20,7	0,86	1,4	650
920007	7	21	24,8	1,20	1,9	500
920008	8	24	27,5	1,49	2,5	400
920010	10	30	34,5	2,41	4,0	250
920013	13	39	45	3,99	6,7	150
920016	16	48	55,5	5,94	10,0	90
920019	19	57	64	8,12	14,0	75
920022	22	66	73,5	10,40	19,0	50

Standard EN 818-2. Overflate: Blå Elektroforetisk lakkert. Sikkerhetsfaktor: 4:1
Standard EN 818-2. Surface: Blue Electrophoretic RAL 5015. Factor of safety: 4:1

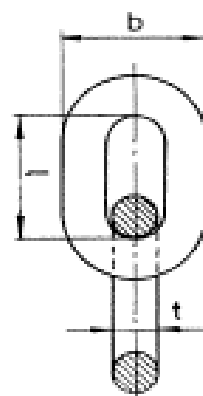

Toppløkker EK-95 / Masterlinks EK-95

Art.nr Item no.	D mm	A mm	B mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall /eske Pcs / box
905813 / **984314	13	115	60	0,35	2,7	20
905816/ **984317	16	120	70	0,6	4,1	20
905820	20	150	80	1,1	6,7	15
905822/ **984322	22	170	90	1,53	8,2	10
905825	25	190	100	2,21	10,7	6
905828/ **984328	28	210	110	3,06	12,9	6
905832/ **984334	32	270	140	5,05	17,1	3
905838/ **984342	38	270	140	7,3	28,1	2
905845	45	320	170	12,2	38,3	2
905850	50	380	200	17,65	45,0	2
905860	60	430	220	28,85	65,3	2
905870	70	500	250	45,48	84,4	1



** Artikkelnummer vil bli erstattet med 9058XX (for detaljer på 9843XX ta kontakt).

** Article number will be replaced with 9058XX (for details on 9843XX please take contact).

Bassert på Standard EN 1677-4*. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 4:1

***Avviker fra EN 1677-4 med hensyn til mål og tonnasje.**

Standard EN 1677-4*. Surface: Blue. Powder coated RAL 5015. Factor of safety: 4:1

*** Deviates from EN 1677-4 with regarding to dimensions and tonnage**

Løfteredskap grade 100 3-part / Chain slings 3-part G10

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
970632	6 mm	2	8,17	3,0	1
970633	6 mm	3	10,58	3,0	1
970634	6 mm	4	12,98	3,0	1
970636	6 mm	6	17,80	3,0	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.
Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
970832	8 mm	2	14,78	5,3	1
970833	8 mm	3	19,25	5,3	1
970834	8 mm	4	23,72	5,3	1
970836	8 mm	6	32,66	5,3	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.
Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
971032	10 mm	2	26,31	8,0	1
971033	10 mm	3	33,66	8,0	1
971034	10 mm	4	41,04	8,0	1
971036	10 mm	6	55,75	8,0	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.
Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
971332	13 mm	2	44,01	14,0	1
971333	13 mm	3	55,62	14,0	1
971334	13 mm	4	67,23	14,0	1
971336	13 mm	6	90,45	14,0	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.
Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
971632	16 mm	2	82,78	21,2	1
971633	16 mm	3	100,28	21,2	1
971634	16 mm	4	117,83	21,2	1
971636	16 mm	6	152,93	21,2	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.
Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1



Andre dimansjoner bygges på ønsket mål.
Ta kontakt for uforpliktende tilbud

Rundsling / Webbing round sling

Art.nr Item no.	WLL Tonn/Ton SF 1:7	Arbeidslenge/ Working length	Omkrets circumference
701001	1,0	0,5 meter	1,0 meter
701002	1,0	1,0 meter	2,0 meter
701003	1,0	1,5 meter	3,0 meter
701004	1,0	2,0 meter	4,0 meter
701005	1,0	2,5 meter	5,0 meter
701006	1,0	3,0 meter	6,0 meter
701008	1,0	4,0 meter	8,0 meter
701010	1,0	5,0 meter	10,0 meter
701012	1,0	6,0 meter	12,0 meter

Art.nr Item no.	WLL Tonn/Ton SF 1:7	Arbeidslenge/ Working length	Omkrets circumference
702001	2,0	0,5 meter	1,0 meter
702002	2,0	1,0 meter	2,0 meter
702003	2,0	1,5 meter	3,0 meter
702004	2,0	2,0 meter	4,0 meter
702005	2,0	2,5 meter	5,0 meter
702006	2,0	3,0 meter	6,0 meter
702008	2,0	4,0 meter	8,0 meter
702010	2,0	5,0 meter	10,0 meter
702012	2,0	6,0 meter	12,0 meter

Art.nr Item no.	WLL Tonn/Ton SF 1:7	Arbeidslenge/ Working length	Omkrets circumference
703001	3,0	0,5 meter	1,0 meter
703002	3,0	1,0 meter	2,0 meter
703003	3,0	1,5 meter	3,0 meter
703004	3,0	2,0 meter	4,0 meter
703005	3,0	2,5 meter	5,0 meter
703006	3,0	3,0 meter	6,0 meter
703008	3,0	4,0 meter	8,0 meter
703010	3,0	5,0 meter	10,0 meter
703012	3,0	6,0 meter	12,0 meter

Art.nr Item no.	WLL Tonn/Ton SF 1:7	Arbeidslenge/ Working length	Omkrets/ Circumference
701001	5,0	0,5 meter	1,0 meter
701002	5,0	1,0 meter	2,0 meter
701003	5,0	1,5 meter	3,0 meter
701004	5,0	2,0 meter	4,0 meter
701005	5,0	2,5 meter	5,0 meter
701006	5,0	3,0 meter	6,0 meter
701008	5,0	4,0 meter	8,0 meter
701010	5,0	5,0 meter	10,0 meter
701012	5,0	6,0 meter	12,0 meter

Art.nr Item no.	WLL Tonn/Ton SF 1:7	Arbeidslenge/ Working length	Omkrets/ Circumference
702001	8,0	0,5 meter	1,0 meter
702002	8,0	1,0 meter	2,0 meter
702003	8,0	1,5 meter	3,0 meter
702004	8,0	2,0 meter	4,0 meter
702005	8,0	2,5 meter	5,0 meter
702006	8,0	3,0 meter	6,0 meter
702008	8,0	4,0 meter	8,0 meter
702010	8,0	5,0 meter	10,0 meter
702012	8,0	6,0 meter	12,0 meter

Andre størrelser på forespørsel. /
Other length and sizes on request.



Rundslinger blir levert i enhold til standard EN-1492-2 100% polyester. Sikkerhetsfaktor 7:1
Round slings are delivered according to EN-1492-2. 100% Polyester. Factor of safety 7:1

H-Sjakler med mutterbolt og splint / Bow shackles bolt pin


Art.nr Item no.	WLL Tonn/Ton SF 1:6	A mm	B mm	C mm	D mm	E mm	Kg/stk Kg/Pcs	Antall/ eske Pcs/box
902808	0,75	21	13	26	10	8	0,10	100
902810	1,0	26	16	35	11	10	0,17	100
902811	1,5	29	19	42	13	11	0,25	100
902813	2,0	33	20	47	16	13	0,42	100
902816	3,25	42	27	60	19	16	0,66	50
902820	4,75	51	31	71	22	19	1,10	40
902822	6,5	58	36	84	25	22	1,80	20
902825	8,5	68	42	95	28	25	2,55	15
902828	9,5	74	46	108	32	28	3,40	10
902832	12,0	82	51	119	35	32	4,00	10
902835	13,5	89	57	131	38	35	5,47	8
902838	17,0	98	60	148	42	38	8,75	5
902845	25,0	127	73	177	51	45	14,66	4
902851	35,0	146	82	197	57	51	20,89	2
902864	55,0	179	105	267	70	69	42	1
902876	85,0	200	127	327	85	79	75	1
902889	120	229	133	368	95	92	106	1
902899	150	254	140	372	107	100	140	1
902901	200	279	184	398	120	115	208	1
902902	250	330	216	506	135	127	318	1

Standard EN 13889. Overflate: Galv. Sikkerhetsfaktor: 1:6.

NB! WLL 250 og 200 tonn har sikkerhetsfaktor 4:1.

Standard EN 13889. Surface: Galvanized. Factor of safety: 6:1

On shackle WLL 200 and 250 ton factor of safety are 4:1

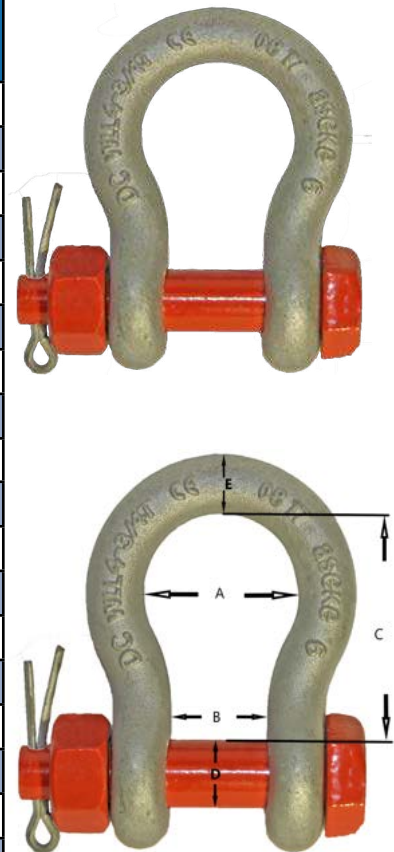


D-Sjakler med øyebolt / D-shackles eye bolt

Art.nr Item no.	WLL Tonn/Ton SF 1:6	B mm	C mm	D mm	E mm	Kg/stk Kg/Pcs	Antall/ eske Pcs/box
902613	2,0	20	41	16	13	0,2	50
902616	3,25	27	51	19	16	0,44	50
902620	4,75	31	60	22	19	0,87	40
902622	6,5	36	71	25	22	1,67	20
902625	8,5	42	81	28	25	1,75	15
902628	9,5	46	91	32	28	3,50	10
902632	12,0	51,5	100	35	32	4,20	10
902635	13,5	57	111	38	35	6,4	8
902638	17,0	60	124	42	38	7,0	5

Standard EN 13889. Overflate: Galv. Sikkerhetsfaktor: 1:6.

Standard EN 13889. Surface: Galvanized. Factor of safety: 6:1

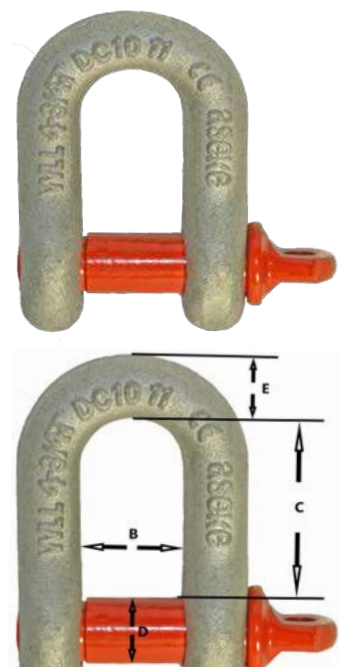

Løfteredskap grade 80 2-part / Chain sling 2-part G8

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
926062	6 mm	2	5,01	1,6	1
926063	6 mm	3	6,61	1,6	1
926064	6 mm	4	8,22	1,6	1
926066	6 mm	6	11,42	1,6	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
926082	8 mm	2	9,22	2,8	1
926083	8 mm	3	12,20	2,8	1
926084	8 mm	4	15,18	2,8	1
926086	8 mm	6	21,14	2,8	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/ eske Pcs/box
926102	10 mm	2	15,66	4,3	1
926103	10 mm	3	20,28	4,3	1
926104	10 mm	4	24,90	4,3	1
926106	10 mm	6	34,14	4,3	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
926132	13 mm	2	27,60	7,5	1
926133	13 mm	3	35,34	7,5	1
926134	13 mm	4	43,08	7,5	1
926136	13 mm	6	58,56	7,5	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
926142	16 mm	2	48,95	11,2	1
926143	16 mm	3	60,65	11,2	1
926144	16 mm	4	72,34	11,2	1
926146	16 mm	6	95,74	11,2	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4



Andre dimansjoner bygges på ønsket mål.
Ta kontakt for uforpliktende tilbud

Løfteredskap grade 80 3-part / Chain sling 3-part G8

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
929062	6 mm	2	8,17	2,4	1
929063	6 mm	3	10,58	2,4	1
926064	6 mm	4	12,98	2,4	1
926066	6 mm	6	17,80	2,4	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
929082	8 mm	2	14,78	4,2	1
929083	8 mm	3	19,25	4,2	1
929084	8 mm	4	23,72	4,2	1
929086	8 mm	6	32,66	4,2	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
929102	10 mm	2	26,31	6,7	1
929103	10 mm	3	33,66	6,7	1
929104	10 mm	4	41,04	6,7	1
929106	10 mm	6	55,75	6,7	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
929132	13 mm	2	44,01	11,2	1
929133	13 mm	3	55,62	11,2	1
929134	13 mm	4	67,23	11,2	1
929136	13 mm	6	90,45	11,2	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
929162	16 mm	2	82,78	17,0	1
929163	16 mm	3	100,28	17,0	1
929164	16 mm	4	117,83	17,0	1
929166	16 mm	6	152,93	17,0	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4




Andre dimansjoner bygges på ønsket mål.
Ta kontakt for uforpliktende tilbud

Øyebolter C15 DIN 580 / Eyebolts C15 DIN 580

Art.nr Item no.	WLL Tonn/Ton SF 1:4	d mm	H mm	b mm	c mm	L mm	Kg/stk Kg/Pcs	Antall/eske Pcs/box
103106	0,09	M6	47	16	6	13	0,06	100
103108	0,14	M8	49	20	8	13	0,07	100
103110	0,23	M10	62	25	10	17	0,15	100
103112	0,34	M12	73	30	12	20,5	0,19	100
103114	0,5	M14	89	35	14	27	0,27	50
103116	0,7	M16	89	35	14	27	0,31	50
103118	0,93	M18	101	40	16	30	0,45	30
103120	1,2	M20	101	40	16	30	0,61	30
103122	1,5	M22	126	50	20	36	0,64	30
103124	1,8	M24	126	50	20	36	0,9	20
103130	3,2	M30	154	60	24	45	1,63	10
103136	5,1	M36	182	70	28	54	2,72	5

Standard DIN 580. Overflate: Galv. Sikkerhetsfaktor: 4:1.

Standard DIN 580. Surface: Galvanized. Factor of safety: 4:1




Øyemutter C15 DIN 582 / Eye nuts C15 DIN 582

Art.nr Item no.	WLL Tonn/Ton SF 1:4	d mm	H mm	b mm	c mm	L mm	Kg/stk Kg/Pcs	Antall/eske Pcs/box
103206	0,09	M6	34	20	6	13	0,06	100
103208	0,14	M8	36	20	8	13	0,07	100
103210	0,23	M10	45	25	10	17	0,15	100
103212	0,34	M12	53	30	12	20,5	0,19	100
103214	0,5	M14	62	35	14	27	0,27	50
103216	0,7	M16	62	35	14	27	0,31	50
103220	1,2	M20	71	40	16	30	0,61	30
103224	1,8	M24	90	50	20	36	0,9	20
103230	3,2	M30	109	60	24	45	1,63	10
103236	5,1	M36	128	70	28	54	2,72	5

Standard DIN 582. Overflate: Galv. Sikkerhetsfaktor: 4:1.

Standard DIN 582. Surface: Galvanized. Factor of safety: 4:1



Polyester Lastsurringer / Polyester webbing for lashing

Art.nr Item no.	LC daN	lengde meter/ Length meter	MBL Kg	Antall eske/pall Pcs. box/pallet
720605	500	0,3+5,7	1000	50/1200
720620	1000	0,3+5,7	2000	25/600
721050	2500	0,5+9,5	5000	8/192

Andre størrelser på forespørsel.

Other length and sizes on request.



Løftehoder EK-96 / Master link assemblies EK-96

Art.nr Item no.	For dim.	Toppløkke/ Masterlink			Balanseløkker/ Intermediate M.L.			Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/ eske Pcs/box
		D mm	A mm	B mm	d mm	a mm	b mm			
905916/987519	7-8	16	120	70	13	95	51	1,19	4,10	20
905920/987522	8	20	170	90	16	120	70	2,5	6,50	15
905922/987530	10	22	170	90	20	150	80	3,77	8,20	10
905925	12	25	190	100	20	150	80	4,45	10,70	8
905928	13	28	210	110	22	170	90	6,12	12,90	6
905932/987540	15	32	270	140	25	190	100	9,47	17,10	4
905938/987550	16	38	270	140	32	270	140	17,4	28,10	2
905945	20	45	320	170	38	270	140	26,76	38,30	1
905950	22	50	380	200	38	270	140	33,2	45,00	1
905960	26	60	430	220	50	380	200	65	65,80	1
905970	32	70	500	250	60	430	220	103	84,40	1

"Små" Artikelnummer vil bli erstattet med 9059XX (for detaljer på 9875XX ta kontakt).


"Small" Article number will be replaced with 9059XX (for details on 9875XX please take contact).

Bassert på Standard EN 1677-4*. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 4:1

*Avviker fra EN 1677-4 med hensyn til mål og tonnasje.

Standard EN 1677-4*. Surface: Blue. Powder coated RAL 5015. Factor of safety: 4:1

* Deviates from EN 1677-4 with regarding to dimensions and tonnage

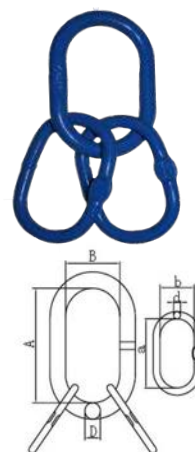


Koblingsledd EK-1001 / Connecting link EK-1001

Art.nr Item no.	Kjetting Dim/ Chain dia.	A mm	L mm	K mm	H mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/ eske Pcs/box
984606	6 mm	16,2	58	42	7	0,08	1,12	20
984608	8 mm	20,5	79,5	60,5	8,5	0,146	2,0	20
984610	10 mm	28	93	68	11,5	0,30	3,15	20
984613	13 mm	30	117	87	15	0,65	5,3	20
984616	16 mm	36,5	148	108	19,8	1,15	8,0	20

Standard EN 1677-1. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4

Standard EN 1677-4. Surface: Blue powder coated RAL 5015. Factor of safety: 4:1

Rep. sett på side 12 / Spare part at page 12

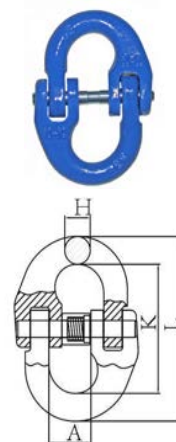

Innkorting med øye EK-1008 / Eye grab hook EK-1008

Art.nr Item no.	Kjetting Dim/ Chain dia.	E mm	B mm	M mm	L mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/ eske Pcs/box
983406	6 mm	8	14,5	43,5	71	0,2	1,4	20
983408	8 mm	10,8	18	53	91,5	0,28	2,5	20
983410	10 mm	13,5	22,5	72	127,5	0,72	4,0	10
983413	13 mm	16,5	28	96	163	1,6	6,7	10
983416	16 mm	19,2	36	112,5	183	2,45	10,0	10

Standard EN 1677-1. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.

Standard EN 1677-1. Surface: Blue powder coated RAL 5015. Factor of safety: 4:1



Løfteredskap grade 80 4-part / Chain sling 4-part G8

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
927062	6 mm	2	10,50	2,4	1
927063	6 mm	3	13,70	2,4	1
927064	6 mm	4	16,91	2,4	1
927066	6 mm	6	23,33	2,4	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
927082	8 mm	2	18,96	4,2	1
927083	8 mm	3	24,92	4,2	1
927084	8 mm	4	30,88	4,2	1
927086	8 mm	6	42,80	4,2	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
927002	10 mm	2	31,70	6,7	1
927003	10 mm	3	40,94	6,7	1
927104	10 mm	4	50,18	6,7	1
927106	10 mm	6	68,66	6,7	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
927132	13 mm	2	56,64	11,2	1
927133	13 mm	3	72,12	11,2	1
927134	13 mm	4	87,60	11,2	1
927136	13 mm	6	118,56	11,2	1


Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
927162	16 mm	2	105,28	17,0	1
927163	16 mm	3	128,68	17,0	1
927164	16 mm	4	152,08	17,0	1
927166	16 mm	6	198,88	17,0	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

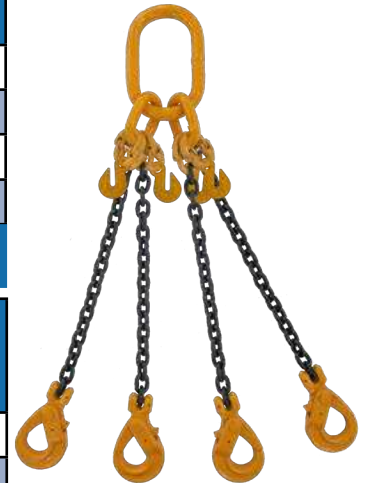


Andre dimansjoner bygges på ønsket mål.
Ta kontakt for uforpliktende tilbud

Kumringsbeslag EK-101 / Lifting clutch EK-101

Art.nr Item no.	E mm	L mm	D mm	M mm	B mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
901205	45	181	70,5	11,5	42	0,89	1 - 1,3	15
901210	57	220	85	16	49	1,3	1,5 - 2,5	8
901221	69	271	88	22	70	3,24	3 - 5	4
901240	83	386	116	30	92	10,01	6 - 10	2
901280	107,5	497	133,5	42	114,5	20,37	12 - 20	1

Standard EN 1677-1. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 1677-1. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

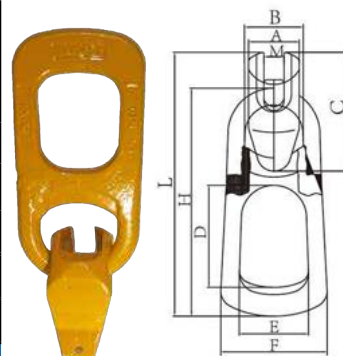


Sveisbare løfteøyer EK-344 / Weldable lifting pad eyes EK-344

Art.nr Item no.	A mm	B mm	D mm	M mm	H mm	Kg/stk Kg/Pcs	WLL Tonn/ Ton SF 1:4	Antall/eske Pcs/box
904302	55	118	22	61	52	1,46	5,3	15

Standard EN 1677-1. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4. Stan-

dard EN 1677-1. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

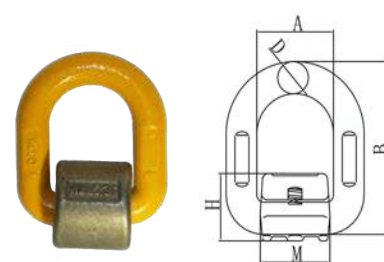


Sveisbare Surrefester EK-310 / Weldable lashing pad eyes EK-310

Art.nr Item no.	A mm	B mm	D mm	E mm	Kg/stk Kg/Pcs	MBL Tonn / ton	Antall/eske Pcs/box
904304	78	130	23	121	2,75	36	6

Standard EN 1677-1. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 1677-1. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4


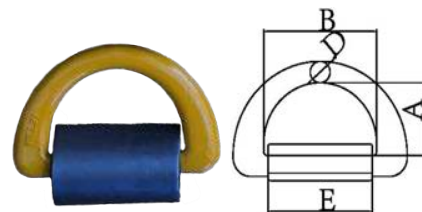


Containerbeslag EK-633 / Container Lifting lugs EK-633

Art.nr Item no.	Type form	L mm	H mm	D mm	E mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/ eske Pcs/box
904306	Venstre/Left	265	166	70	48	4,0	12,5	4
904307	Høyre/Right	265	166	70	48	4,0	12,5	4

Standard EN 1677-1. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 1677-1. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

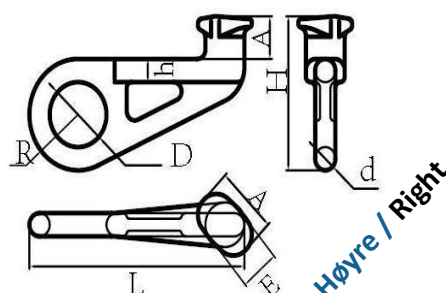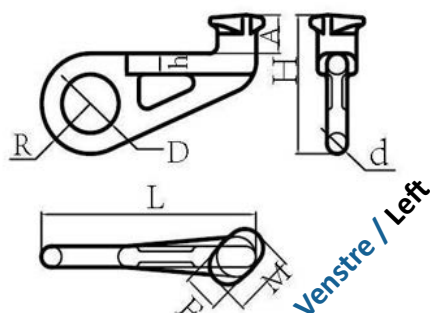

Reparasjonssett for sperrekroker / Spare part kit for clevis and eye sling hooks

Art.nr Item no.	For dim:	Antall/eske Pcs/box
903206 X	6 mm	10
903208 X	7+8 mm	10
903210 X	10 mm	10
903213 X	13 mm	10
903216 X	16 mm	10



For type
EK-12 + EK-13
EK-1004

Reparasjonssett for selvlukkende kroker / Spare part kit for self locking hooks

Art.nr Item no.	For dim:	Antall/eske Pcs/box
903606 X	6 mm	10
903608 X	7+8 mm	10
903610 X	10 mm	10
903613 X	13 mm	10
903616 X	16 mm	10



For type
EK-82/738 +
EK-737

Reparasjonssett for omega løkker / Load pin kit for omega links

Art.nr Item no.	For dim:	Antall/eske Pcs/box
904808 X	7+8 mm	6
904810 X	10 mm	6
904813 X	13 mm	4
904816 X	16 mm	4



For type
EK-2

Reparasjonssett for Gravemaskinkrok / Spare part kit for excavator hooks

Art.nr Item no.	For dim:	Antall/eske Pcs/box
903802 X	2 Tonn	3
903803 X	3 Tonn	3
903805 X	5 Tonn	3
903808 X	8 Tonn	3
903810 X	10 Tonn	3



For type
EK-19

Reparasjonssett for koblingsledd / Spare part kit for connecting links

Art.nr Item no.	For dim:	Antall/eske Pcs/box
904608 X	8 mm	10
904610 X	10 mm	10
904613 X	13 mm	10
904616 X	16 mm	10
904620 X	20 mm	10
904622 X	22 mm	10
904626 X	26 mm	10
904632 X	32 mm	10



For type
EK-74

Reparasjonssett for selvlukkende kroker / Spare part kit for self locking hooks

Art.nr Item no.	For dim:	Antall/pose Pcs/bag
983608 X	7+8 mm	10
983610 X	10 mm	10
983613 X	13 mm	10
983616 X	16 mm	10




For type
EK-1005
EK-1006

Omega kobling EK-2 / Omega Links EK-2

Art.nr Item no.	For dim.	A mm	B mm	L mm	H mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
904808	7+8 mm	10	52	68,5	35	0,22	2,0	20
904810	10 mm	12	62	81	40,5	0,36	3,15	20
904813	13 mm	15	81	108	54	0,71	5,3	10
904816	16 mm	19	99	126	64	1,3	8,0	10
904819	20 mm	23	118	152	75,6	2,2	12,5	5

Standard EN 1677-1. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 1677-1. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 4:1

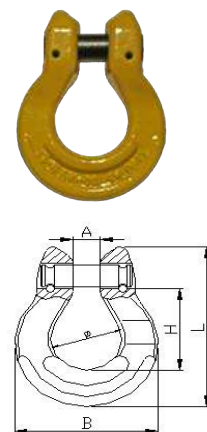


Innkorting med gaffel EK-86 / Clevis grab hooks EK-86

Art.nr Item no.	For dim:	F mm	H mm	L mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
903908	7+8 mm	11	21	89	0,32	2,0	20
903910	10 mm	13	29	126	0,73	3,15	10

Standard EN 1677-1. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 1677-1. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 4:1




Innkorting med øye EK-85 / Eye grab hooks EK-85

Art.nr Item no.	For dim:	E mm	R mm	L mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
903406	6 mm	8	51,4	75,3	0,14	1,12	20
903408	7/8 mm	10,8	61,5	91,2	0,245	2,0	20
903410	10 mm	13	80	122	0,65	3,15	20
903413	13 mm	16,5	99,7	158	1,39	5,3	15
903416	16 mm	20	104	169	2,2	8,0	8
903420	20 mm	25	140	219	4,6	12,5	3
903422	22 mm	28	165	259	8,2	15,0	2
90326	26 mm	30	188,8	298	9,8	21,2	2

Standard EN 1677-1. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 1677-1. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 4:1

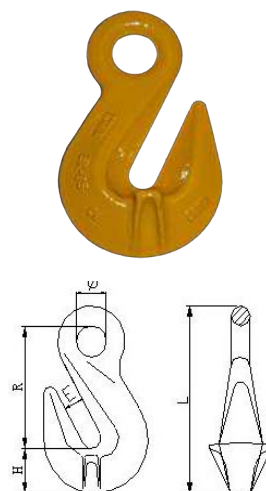


Støperi krok med øye EK-116 / Eye foundry hooks EK-116

Art.nr Item no.	For dim:	E mm	B mm	H mm	M mm	L mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
901008	7+8 mm	62	130	19	26	158	0,72	2,0	20
901010	10 mm	73	152	25	31	199	1,25	3,15	12
901013	13 mm	90	186	33	38,5	241	2,32	5,3	6
901016	16 mm	105	218	37	41	279	3,45	8,0	4

Standard EN 1677-1. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 1677-1. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 4:1

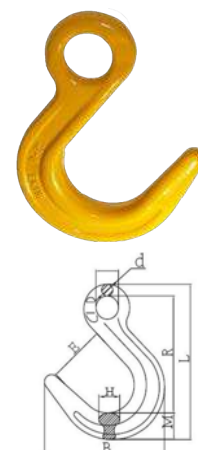

Løfteredskap grade 80 1-part / Chain slings 1-part G8

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
924062	6 mm	2	2,68	1,1	1
924063	6 mm	3	3,49	1,1	1
924064	6 mm	4	4,29	1,1	1
904066	6 mm	6	5,89	1,1	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
924082	8 mm	2	4,75	2,0	1
924083	8 mm	3	6,24	2,0	1
924084	8 mm	4	7,73	2,0	1
924086	8 mm	6	10,71	2,0	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
924102	10 mm	2	7,92	3,15	1
924103	10 mm	3	10,23	3,15	1
924104	10 mm	4	12,54	3,15	1
924106	10 mm	6	17,16	3,15	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
924132	13 mm	2	14,15	5,3	1
924133	13 mm	3	18,02	5,3	1
924134	13 mm	4	21,89	5,3	1
924136	13 mm	6	29,63	5,3	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
924142	16 mm	2	25,32	8,0	1
924143	16 mm	3	31,17	8,0	1
924144	16 mm	4	36,75	8,0	1
924146	16 mm	6	48,45	8,0	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4



Andre dimansjoner bygges på ønsket mål.
Ta kontakt for uforpliktende tilbud

Løfteredskap grade 100 2-part / Chain slings 2-part G10

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
970622	6 mm	2	5,01	2,0	1
970623	6 mm	3	6,61	2,0	1
970624	6 mm	4	8,22	2,0	1
970626	6 mm	6	11,42	2,0	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
970822	8 mm	2	9,22	3,55	1
970823	8 mm	3	12,20	3,55	1
970824	8 mm	4	15,18	3,55	1
970826	8 mm	6	21,14	3,55	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
971022	10 mm	2	15,66	5,6	1
971023	10 mm	3	20,28	5,6	1
971024	10 mm	4	24,90	5,6	1
971026	10 mm	6	34,14	5,6	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
971322	13 mm	2	27,60	9,5	1
971323	13 mm	3	35,34	9,5	1
971324	13 mm	4	43,08	9,5	1
971326	13 mm	6	58,56	9,5	1


Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
971622	16 mm	2	45,95	14,0	1
971623	16 mm	3	60,65	14,0	1
971624	16 mm	4	72,34	14,0	1
971626	16 mm	6	95,74	14,0	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.


Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1

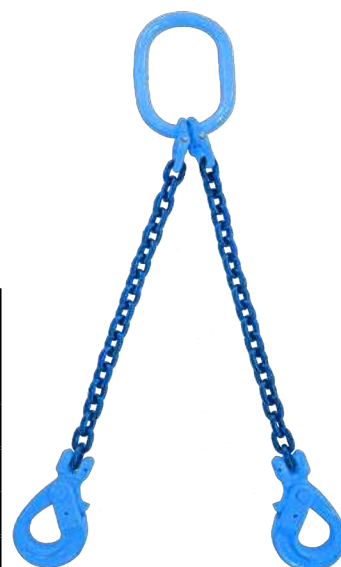

Andre dimansjoner bygges på ønsket mål. Ta kontakt for uforpliktende tilbud

Toppløkker EK-95 / Masterlinks EK-95

Art.nr Item no.	D mm	A mm	B mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall /eske Pcs / box
905813	13	115	60	0,35	2,7	20
905816	16	120	70	0,6	4,1	20
905820	20	150	80	1,1	6,7	15
905822	22	170	90	1,53	8,2	10
905825	25	190	100	2,21	10,7	6
905828	28	210	110	3,06	12,9	6
905832	32	270	140	5,05	17,1	3
905838	38	270	140	7,3	28,1	2
905845	45	320	170	12,2	38,3	2
905850	50	380	200	17,65	45,0	2
905860	60	430	220	28,85	65,3	2
905870	70	500	250	45,48	84,4	1

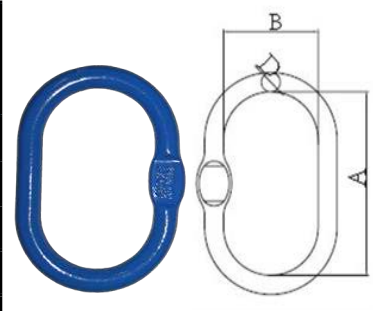

Bassert på Standard EN 1677-4*. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 4:1


*Avviker fra EN 1677-4 med hensyn til mål og tonnasje.

Standard EN 1677-4*. Surface: Blue. Powder coated RAL 5015. Factor of safety: 4:1

* Deviates from EN 1677-4 with regarding to dimensions and tonnage

Løftehoder EK-96 / Master link assemblies EK-96

Art.nr Item no.	For dim.	Toppløkke/ Masterlink			Balanseløkker/ Intermediate M.L.			Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/ eske Pcs/box
		D mm	A mm	B mm	d mm	a mm	b mm			
905916	7-8	16	120	70	13	95	51	1,19	4,10	20
905920	8	20	170	90	16	120	70	2,5	6,50	15
905922	10	22	170	90	20	150	80	3,77	8,20	10
905925	12	25	190	100	20	150	80	4,45	10,70	8
905928	13	28	210	110	22	170	90	6,12	12,90	6
905932	15	32	270	140	25	190	100	9,47	17,10	4
905938	16	38	270	140	32	270	140	17,4	28,10	2
905945	20	45	320	170	38	270	140	26,76	38,30	1
905950	22	50	380	200	38	270	140	33,2	45,00	1
905960	26	60	430	220	50	380	200	65	65,80	1
905970	32	70	500	250	60	430	220	103	84,40	1

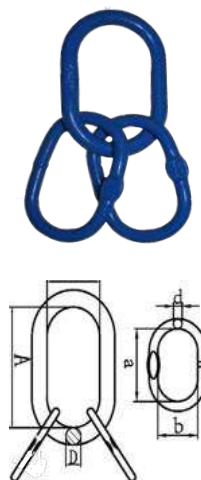

Bassert på Standard EN 1677-4*. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 4:1

*Avviker fra EN 1677-4 med hensyn til mål og tonnasje.

Standard EN 1677-4*. Surface: Blue. Powder coated RAL 5015. Factor of safety: 4:1

* Deviates from EN 1677-4 with regarding to dimensions and tonnage

Lastsurrings kjetting Grade 80 Krok/Krok / Lashing chains G8 with hook/hook

Art.nr Item no.	Kjetting Dim/ Chain dia	lengde meter/ Length meter	Kg/stk Kg/Pcs	MBL kN	LC kN	Antall/eske Pcs/box
921406	6 mm	6	5,2	44	22	2
921503	8 mm	3	4,9	80	40	2
921504	8 mm	4	6,3	80	40	1
921506	8 mm	6	11,8	80	40	1
921602	10 mm	2	6,1	126	63	2
921603	10 mm	3	8,3	126	63	1
921604	10 mm	4	10,5	126	63	1
921606	10 mm	6	15,0	126	63	1
921608	10 mm	8	19,4	126	63	1
921702	13 mm	2	10,6	212	106	1
921704	13 mm	4	18,0	212	106	1
921706	13 mm	6	25,5	212	106	1
921708	13 mm	8	33,1	212	106	1

Kjetting: Standard EN 818-2. Overflate: Elektroforetisk

Kroker.: Standard EN 1677-1. Overflate: Gul pulverlakkert RAL 1003.

Surrekjetting leveres i henhold til standard EN 12195-3

Chain: Standard EN 818-2. Surface: Black Electrophoretic. Factor of safety: 4:1

Hooks: Standard EN 1677-1. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Lashing chain are delivered according to EN 12195-3




Kjettingstrammere Grade 80 / Ratchet load binders G8

Art.nr Item no.	For kjetting dim./ For chain dia.	MBL kN	LC kN	Kg/stk Kg/Pcs	A mm	B mm	H mm	Lmin mm	Lmax mm	L mm
916008	6 - 8 mm	44	22	1,6	-	-	-	260	400	-
916010	8 - 10 mm	80,4	43	5	50	25	92	340	500	210
916013	10 - 13 mm	126	75	6	50	25	118	365	525	280
916016	13 - 16 mm	212	104	8	72	30	146,5	365	525	355
916017	16 mm (Gul)	314	111,5	11,5	72	32	178	390	550	355

Standard EN 12195-3, Overflate: Rød pulverlakkert RAL 3020.

Standard EN 12195-3. Surface: Red. Powder coated RAL 3020.

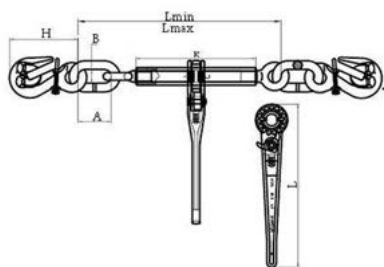


Sperrekrok med gaffel EK-1004 / Clevis slingshooks EK-1004

Art.nr Item no.	Kjetting Dim/ Chain dia.	L mm	E mm	H mm	M mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
983206	6 mm	109	18,5	21	68,5	0,33	1,4	20
983208	8 mm	134	25	27,5	88	0,7	2,5	15
983210	10 mm	161,5	28	33,5	105,5	1,3	4,0	10
983213	13 mm	203	38	42	134	2,3	6,7	5
983216	16 mm	248	44	50	160,5	3,6	10,0	4

Standard EN 1677-2. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.

Standard EN 1677-2. Surface: Blue powder coated RAL 5015. Factor of safety: 4:1

Rep. sett på side 12 / Spare part at page 12

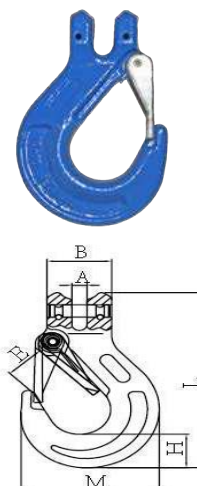


Selvlukkende krok med gaffel EK-1006 / Clevis self locking hook EK-1006

Art.nr Item no.	Kjetting Dim/ Chain dia.	A mm	E mm	H mm	L mm	M mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
983606	6 mm	7,5	28	20	131	70	0,5	1,4	25
983608	8 mm	9,5	35,5	26	166	90	0,9	2,5	25
983610	10 mm	12	45	30	196	109	1,6	4,0	14
983613	13 mm	15	53,5	40,5	251	138	2,9	6,7	6
983616	16 mm	17,5	62	50,5	303	170	5,8	10,0	3

Standard EN 1677-3. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.

Standard EN 1677-3. Surface: Blue powder coated RAL 5015. Factor of safety: 4:1

Rep. sett på side 12 / Spare part at page 12



Selvlukkende krok med øye EK-1005 / Eye self locking hook EK-1005

Art.nr Item no.	Kjetting Dim/ Chain dia.	A mm	E mm	R mm	L mm	H mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
983508	8 mm	27	51	137	175	26	0,9	2,5	26
983510	10 mm	34,5	64,3	169	212,5	30	1,5	4,0	14

Standard EN 1677-3. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 1:4.

Standard EN 1677-3. Surface: Blue powder coated RAL 5015. Factor of safety: 4:1

Rep. sett på side 12 / Spare part at page 12



Rundsling kroker EK-1055 Grade 100 / Round sling hook EK-1055 Grade 10

Art.nr Item no.	WLL 1:4 Tonn/Ton	Kg/stk Kg/Pcs	Antall/eske Pcs/box
985001	1,0	0,73	10
985002	2,0	1,28	10
985003	3,0	2,23	8
985005	5,0	4,63	4

Standard EN 1677-2. Sikkerhetsfaktor: 1:4.

Standard EN 1677-2. Factor of safety: 4:1



1 Tonn/Ton



2 Tonn/Ton



3 Tonn/Ton



5 Tonn/Ton


Koblingsledd EK-74 / Connecting links EK-74

Art.nr Item no.	For dim.	A mm	L mm	K mm	H mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
904606	6 mm	16,2	58	42	7	0,08	1,12	20
904608	7+8 mm	20,5	79,5	60,5	8,5	0,146	2,0	20
904610	10 mm	28	93	68	11,5	0,30	3,15	20
904613	13 mm	30	117	87	15	0,65	5,3	20
904616	16 mm	36,5	148	108	19,8	1,15	8,0	20
904620	20 mm	44	169,5	121,5	24	2,10	12,5	10
904622	22 mm	51	193,5	141,5	26	2,87	15,0	6
904626	26 mm	58	220	158	30	4,50	21,2	4
904632	32 mm	67,5	281	205	37	8,21	31,5	2

Standard EN 1677-1. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4

Standard EN 1677-1. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Rep sett på side 12 / spare parts on page 12

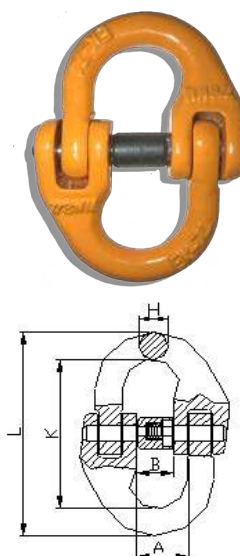


Rundslingskobling EK-1 / Round sling couplings EK-1

Art.nr Item no.	For dim.	A mm	B mm	K mm	G mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
904708	7+8 mm	20	61,5	63,7	24	0,3	2,0	20
904710	10 mm	24	66	83	30,5	0,68	3,15	20
904713	13 mm	28	88	93,7	36,8	1,47	5,3	14
904716	16 mm	34,5	108	120	45,2	2,3	8,0	10

Standard EN 1677-1. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 1677-1. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Rep sett på side 12 / spare parts on page 12

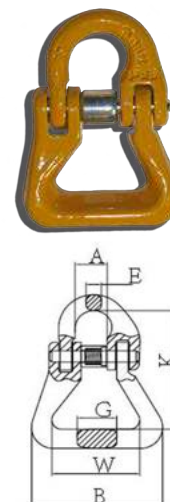

Fatløfter for stående fat / Drum Lifter

Art.nr Item no.	Lengde / Length	Kjetting / Chain	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
921920	690 mm	6 mm	3,0	0,7	1

Standard EN 818-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4



Trommelløfter kulelagersvivel / Tumble lifter ball bearing swivel

Art.nr Item no.	Hulldia på trommel / Hole dia. on drum	Lengde / Length	Lengde "pistol"	Kjetting / Chain	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/ eske Pcs/box
921908	45 mm	0,8 meter	180 mm	8	4,4	2,0	1
921910	65 mm	1,0 meter	235 mm	10	6,7	3,15	1
921913	70 mm	1,0 meter	280 mm	13	13,1	5,3	1

Standard EN 818-4, og EN 1677. Overflate: Rød pulverlakkert RAL 3020. Sikkerhetsfaktor: 1:4.

Standard EN 818-4. Surface: Red. Powder coated RAL 3020. Factor of safety: 1:4



Selvlukkende krok med gaffel EK-82/738 / Clevis self locking hooks EK-82/738

Art.nr Item no.	For dim:	B mm	E mm	E1 mm	L mm	L1 mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
903606	6 mm	32	35	28	131	96	0,44	1,12	26
903608	7+8 mm	38,5	40	35,8	162	119	0,8	2,0	26
903610	10 mm	46	50	45	195	142	1,38	3,15	14
903213	13 mm	59	60	52,5	249	179	2,81	5,3	6
903216	16 mm	77	65	63,3	310	225	6,0	8,0	3

Standard EN 1677-3. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 1677-3. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Rep sett på side 12 / spare parts on page 12




Selvlukkende krok med svivel EK-83/755 / Swivel self locking hooks EK-83/755

Art.nr Item no.	For dim:	A mm	B mm	E mm	L mm	L1 mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
904908	7+8 mm	36	29,5	40	228	189	1,15	2,0	10
904910	10 mm	42	35	50	270	224	1,86	3,15	10
904913	13 mm	50	41	60	324	267	3,51	5,3	6
904916	16 mm	61	56,8	65	406	355	7,33	8,0	3

Standard EN 1677-3. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:4.

Standard EN 1677-3. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Rep sett på side 12 / spare parts on page 12

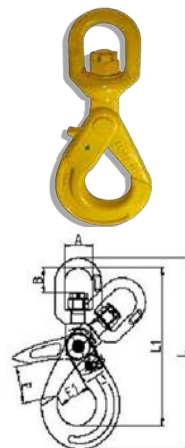


Gravemaskin krok EK-19 / Excavator Weld-on-hooks EK-19

Art.nr Item no.	E mm	B mm	H mm	L mm	P mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
903802	30	92	81	114	34	0,83	2,0	4
903803	33,2	106	116	129	36	1,20	3,0	4
903805	35	133	159	171	43,5	2,46	5,0	4
903808	43,3	136,5	159	177	51	3,26	8,0	2
903810	50,5	169,5	194	223	53	5,17	10,0	2

Standard EN 1677-2. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 1:5.

Standard EN 1677-2. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 1:4

Rep sett på side 12 / spare parts on page 12

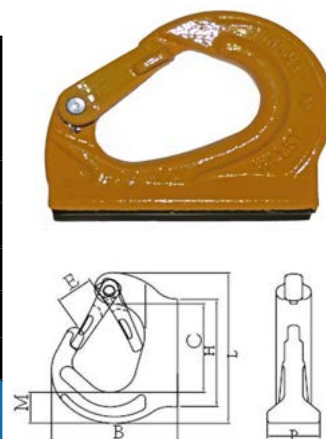

Lastsurrings kjetting Grade 100 Krok/Krok / Lashing chains G10 hook/hook

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	MBL kN	Antall/eske Pcs/box
981406	6 mm	6	5,82	27,5	2
981503	8 mm	3	5,87	49	2
981504	8 mm	4	7,36	49	1
981506	8 mm	6	10,34	49	1
981702	10 mm	2	7,42	78,5	2
981703	10 mm	3	9,83	78,5	1
981704	10 mm	4	12,24	78,5	1
981706	10 mm	6	17,06	78,5	1
981708	10 mm	8	21,88	78,5	1
981802	13 mm	2	12,58	131,4	1
981804	13 mm	4	20,56	131,4	1
981806	13 mm	6	28,54	131,4	1
981808	13 mm	8	36,52	131,4	1

Kjetting: Standard EN 818-2. Overflate: Blå Elektroforetisk

Kroker: Standard EN 1677-1. Overflate: Blå pulverlakkert RAL 5015.

Surrekjetting leveres i henhold til standard EN 12195-3

Chain: Standard EN 818-2. Surface: Blue Electrophoretic. Factor of safety: 4:1

Hooks: Standard EN 1677-1. Surface: Blue. Powder coated RAL 5015. Factor of safety: 1:4

Lashing chain are delivered according to EN 12195-3




Kjettingstrammere Grade 100 / Ratchet load binders G10

Art.nr Item no.	Kjetting Dim/ Chain dia.	MBL kN	LC kN	Kg/stk Kg/Pcs	A mm	D mm	H mm	Lmin mm	Lmax mm	L mm
986008	8 mm	100	50	3,71	50	12	98	340	500	383
986010	10 mm	160	80	5,85	50	14	121,5	365	525	390
986013	13 mm	268	134	9,34	72	20	159,5	365	525	392

Standard EN 12195-3, Overflate: Blå pulverlakkert RAL 5015.

Standard EN 12195-3. Surface: Blue Powder coated RAL 5015.

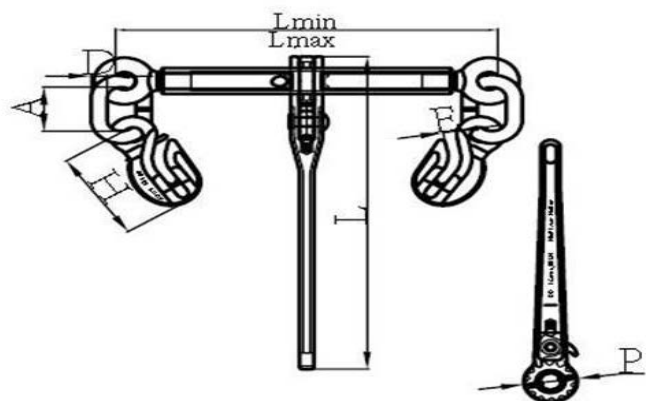

Løfteredskap grade 100 4-part / Chain slings 4-part G10

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
970642	6 mm	2	10,50	3,0	1
970643	6 mm	3	13,70	3,0	1
970644	6 mm	4	16,91	3,0	1
970646	6 mm	6	23,33	3,0	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 4:1.
Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
970842	8 mm	2	18,96	5,3	1
970843	8 mm	3	24,92	5,3	1
970844	8 mm	4	30,88	5,3	1
970846	8 mm	6	42,80	5,3	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 4:1.
Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
971042	10 mm	2	31,70	8,0	1
971043	10 mm	3	40,94	8,0	1
971044	10 mm	4	50,18	8,0	1
971046	10 mm	6	68,66	8,0	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 4:1.
Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
971342	13 mm	2	56,64	14,0	1
971343	13 mm	3	72,12	14,0	1
971344	13 mm	4	87,60	14,0	1
971346	13 mm	6	118,56	14,0	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 4:1.
Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1

Art.nr Item no.	Kjetting Dim/ Chain dia.	lengde meter/ Length meter	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
971642	16 mm	2	105,28	21,2	1
971643	16 mm	3	128,68	21,2	1
971644	16 mm	4	152,08	21,2	1
971646	16 mm	6	198,88	21,2	1

Standard EN 818-4. Overflate: Blå pulverlakkert RAL 5015. Sikkerhetsfaktor: 4:1.
Standard EN 818-4. Surface: Blue Powder coated RAL 5015. Factor of safety: 4:1




Andre dimansjoner bygges på ønsket mål.
Ta kontakt for uforpliktende tilbud

Grade 80 kjetting / Grade 8 Chains

Art.nr Item no.	t mm	l mm	b mm	Kg / m	WLL Tonn/Ton SF 1:4	Meter / fat Meters per drum
921006	6	18	20,7	0,86	1,12	650
921007	7	21	24,8	1,20	1,5	500
921008	8	24	27,5	1,49	2,0	400
921010	10	30	34,5	2,41	3,15	250
921013	13	39	45	3,99	5,3	150
921016	16	48	55,5	5,94	8,0	90
921019	19	57	64	8,12	11,2	75
901020	20	60	68	8,64	12,5	60
921022	22	66	73,5	10,40	15,0	50
921026	26	78	89	14,80	21,2	35
921032	32	96	112	22,36	31,5	22

Standard EN 818-2. Overflate: Sort Elektroforetisk lakkert. Sikkerhetsfaktor: 4:1

Standard EN 818-2. Surface: Black Electrophoretic. Factor of safety: 4:1

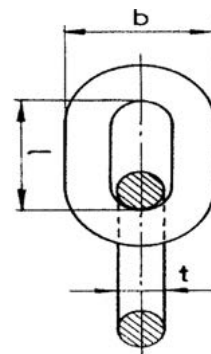


Toppløkker EK-33 / Masterlinks EK-33

Art.nr Item no.	D mm	A mm	B mm	Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall /eske Pcs / box
904313	13	110	60	0,34	1,6	20
904316	16	110	60	0,54	2,12	20
904319	18	135	75	0,83	3,15	20
904322	22	160	90	1,50	5,3	10
904325	26	180	100	2,32	8,0	8
904332	32	200	110	3,95	11,2	4
904336	36	260	140	6,34	14,0	2
904340	40	300	160	8,96	17,0	2
904345	45	340	180	12,80	21,2	2

Standard EN 1677-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 4:1

Standard EN 1677-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 4:1



Løftehoder EK-32 / Master link assemblies EK-32

Art.nr Item no.	For dim.	Toppløkke/ Masterlink			Balanseløkker/ Intermediate M.L.			Kg/stk Kg/Pcs	WLL Tonn/Ton SF 1:4	Antall/eske Pcs/box
		D mm	A mm	B mm	d mm	a mm	b mm			
904516	6-8	18	135	75	13	54	25	1,18	2,12	10
904520	7-8	18	135	75	13	60	38	1,24	3,15	8
904522	8-8	22	160	90	16	70	34	2,2	4,25	8
904528	10-8	26	180	100	18	85	40	3,4	6,7	4
904532	13-8	32	200	110	22	115	50	6,1	11,2	2
904538	16-8	36	260	140	26	140	65	9,98	17,0	1

Standard EN 1677-4. Overflate: Gul pulverlakkert RAL 1003. Sikkerhetsfaktor: 4:1

Standard EN 1677-4. Surface: Yellow. Powder coated RAL 1003. Factor of safety: 4:1

